Printed Pages:03 Sub Code: RCS 406

Paper Id: 1 1 0 4 3 6

Roll No.					

## B.TECH (SEMESTER IV) THEORY EXAMINATION 2017-18 DATA STRUCTURE & ALGORITHMS

Time: 3 Hours Total Marks: 70

Note: 1. Attempt all Sections. If require any missing data; then choose suitably.

2. Any special paper specific instruction.

#### **SECTION A**

### 1. Attempt *all* questions in brief.

 $2 \times 7 = 14$ 

- a. What do you mean by Abstract Data Type of a data structure?
- b. Differentiate internal sorting and external sorting also enlists the name of two sorting techniques of each.
- c. Write a C program to multiply two integer number using recursion
- d. What do you mean by priority queue?
- e. Define Threaded binary tree with advantage over binary tree.
- f. Explain Transitive Closure.
- g. Write the function to insert an element is circular queue.

#### **SECTION B**

### 2. Attempt any *three* of the following:

 $7 \times 3 = 21$ 

- a. Consider the two dimensional lower triangular matrix(LTM) of order N ,Obtain the formula for address calculation in the address of row major and column major order for location LTM[j][k],if base address is BA and space occupied by each element is w byte.
- b. In the Towers of Hanoi puzzle, we are given a platform with three tower, a,b, and c, sticking out of it. On tower a is a stack of n disks, each larger than the next, so that the smallest is on the top and the largest is on the bottom .The puzzle is to move all the disks from tower a to tower c, moving one disk at a time,so that we never place a larger disk on top of a smaller one.
  - (i) Describe a recursive algorithm for solving the Towers of Hanoi puzzle for. arbitrary n disk
  - (ii) How many function calls are there for n disks?.
- c. Define stack with suitable example. Write a program to reverse a string using Stack. Choose a C data structure for such a stack and design push and pop functions for it.
- d. Translate the infix string  $(a+b^c^d)^*(e+f/d)$  to reverse polish notation using stack.
- e. Explain any three commonly used hash function with the suitable example? A hash function H defined as H(key) =key%7, with linear probing ,is used to insert the key 37,38,72,48,98,11,56 into a table indexed from 0 to 6.

what will be the location of key 11. Justify your answer, also count the total number of collision in this probing.

#### **SECTION C**

## 3. Attempt any *one* part of the following:

 $7 \times 1 = 7$ 

- a. What are the advantages of linked list over arrays? Implement Doubly Circular linked list and insert an element at given position in this linked list.
- b. Assume that the operators +, -,  $\times$  are left associative and  $^{\wedge}$  is right associative.

The order of precedence (from highest to lowest) is  $^{\land}$ , x  $^{\rightarrow}$ , +, -.

Then find the postfix expression corresponding to the infix

Expression  $a + b \times c - d \wedge e \wedge f$ 

## 4. Attempt any *one* part of the following:

 $7 \times 1 = 7$ 

a. Draw the Huffman tree for the following symbols (each of 7 bits) whose frequency Of occurrence of a message is stated along with the symbols below:

M1: 0.45

M2:0.02

M3: 0.24

M4: 0.18 M5: 0.11

decode the following message

1011001101111110011001011111101101100.


and what is the average number of bits required per message.

b. Write algorithm for Floyd warshall algorithm also explains with a suitable example.

### 5. Attempt any *one* part of the following:

 $7 \times 1 = 7$ 

- a. Write C function for following in Binary Tree
  - (i) Count the number of total nodes.
  - (ii) Height of Binary Tree.
- b. Write Prim's algorithms and Find the Minimum Spanning tree for following graph

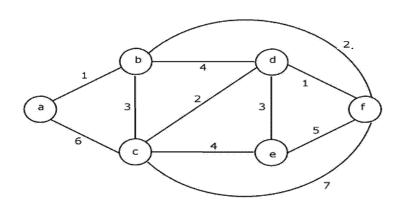

## 6. Attempt any *one* part of the following:

 $7 \times 1 = 7$ 

a. Construct a binary tree for the following preorder and inorder traversals. Explain with a neat diagram:


Preorder: ABDIEHJCFKLGM Inorder: DIBHJEAFLKCGM

b. Explain Binary Search algorithm and it time complexity? Implement the binary search in C language.

# 7. Attempt any *one* part of the following:

 $7 \times 1 = 7$ 

a. Discuss what type of data structure used in DFS. Write an algorithm for DFS, Traverse the given graph starting from node A using DFS



b. Construct an expression tree for the expression  $(-b + \sqrt{(b^2 - 4ac)})/2a$ . Give pre-order, in-order and post-order traversals of the expression tree so formed